



Title	Some Fundamental Characteristics of Microwave Plasma Beam as a Heat Source (1)
Author(s)	Arata, Yoshiaki; Miyake, Shoji; Takeuchi, Sadao
Citation	Transactions of JWRI. 1972, 1(1), p. 115-116
Version Type	VoR
URL	<a href="https://doi.org/10.18910/11725">https://doi.org/10.18910/11725</a>
rights	
Note	

*The University of Osaka Institutional Knowledge Archive : OUKA*

<https://ir.library.osaka-u.ac.jp/>

The University of Osaka

# Some Fundamental Characteristics of Microwave Plasma Beam as a Heat Source (1)<sup>†</sup>

Yoshiaki ARATA\*, Shoji MIYAKE\*\* and Sadao TAKEUCHI\*\*\*

Plasma production with microwave in an atmospheric pressure has been investigated by many workers<sup>1~3</sup>. They briefly referred to "plasma torch" stabilized by axial or tangential gas flow. With a microwave power up to 1 kW it is reported that a weakly ionized plasma in a local thermal equilibrium state is obtained and the electron temperature is below 1 eV.

While P. L. Kapitza<sup>4</sup> has studied a fully plasma column produced in a cavity resonator at 1~3 atm. with a high power microwave generator of 175 kW, CW. He has succeeded in producing a fully ionized high temperature plasma ( $T_e \approx 100$  eV) in a steady state by circulating deuterium gas in the cavity. In this case maximum power absorbed reached 20 kW and the dimension of the plasma with a filamentary shape attained around 10 cm in length and 1 cm in diameter.

From these experimental results we have begun to study high power microwave discharge in a high pressure environmental gas over 1 atm. to obtain a stable high temperature plasma beam as a new type heat source.

In this report some fundamental characteristics of microwave torch-like plasma at a power level of 3 kW with a frequency 2.45 GHz are studied.

HF discharge is ignited at an open end of a coaxial wave guide where a water-cooled tungsten electrode is placed on the tip of the inner conductor. Plasma forming gas ( $N_2$ ) is introduced axially into the wave guide with flow rate 50~200 l/min. Once started in this way the discharge is stable and the power reflection coefficient can be kept below 5% up to 3 kW incident power.

With a CdS cell axial intensity distribution of light emission from a plasma is recorded on an X-Y recorder to obtain plasma length from its half length,  $L$  as illustrated in **Fig. 1**. The plasma length is proportional to the microwave power  $P_t$  and indicates around 10 cm at  $P_t = 2.5$  kW. While plasma diameter is measured with a monochromator from half width of the radial intensity distribution of  $H_\beta$  line spectrum

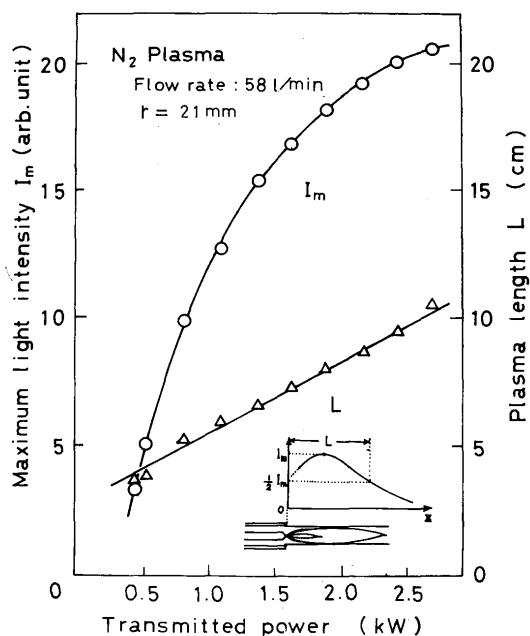


Fig. 1. Dependence of maximum light emission,  $I_m$  and plasma length  $L$  measured with CdS cell on microwave power.  $L$  is determined from half length of axial intensity distribution.

obtained from mixing 5%  $H_2$  as a probing gas. The plasma beam attains 6 mm at  $P_t = 2.5$  kW,  $z = 1.5$  cm and it is also proportional to the microwave power. When a flow rate of the gas is increased, the plasma becomes slenderer and the power reflection coefficient smaller.

The flame produced by polyatomic gases ( $N_2$ ,  $CO_2$ , air) has a stable figure and a small reflection coefficient, while a plasma produced from monoatomic gases (Ar, He) is not so easy to operate at high power ( $P_t \geq 1$  kW) and has a large reflection coefficient. At high power the flash over between the outer and the inner conductors tends to appear for these gases.

Spectroscopic measurement with a monochromator indicated that the intensity of hydrogen Balmer series lines did not show Boltzmann distribution. So that we don't at present obtain electron temperature and plasma density for  $N_2$  plasma beam. Further careful

<sup>†</sup> Received on May 31, 1972

\* Professor

\*\* Research Instructor

\*\*\* Graduate student

and detailed investigations are expected in near future.

#### References

- 1) J. D. Cobine and D. A. Willbur: *J. appl. Phys.* **22** (1951) 835.
- 2) L. Mollow: *Ann. Phys. (Germany)* **2** (1958) 97.
- 3) S. Murayama: *J. appl. Phys.* **39** (1968) 5478.
- 4) P. L. Kapitza: *Soviet Physics—JETP* **30** (1970) 973.