



Title	RISK ASSESSMENT OF WASTEWATER TOXICITY FROM INDUSTRIAL PARKS IN SAIGON-DONGNAI RIVER BASIN
Author(s)	Do, Hong Lan Chi; Becker, K.; Van, Slooten
Citation	Annual Report of FY 2006, The Core University Program between Japan Society for the Promotion of Science (JSPS) and Vietnamese Academy of Science and Technology (VAST). 2007, p. 67-70
Version Type	VoR
URL	https://hdl.handle.net/11094/13134
rights	
Note	

The University of Osaka Institutional Knowledge Archive : OUKA

<https://ir.library.osaka-u.ac.jp/>

The University of Osaka

RISK ASSESSMENT OF WASTEWATER TOXICITY FROM INDUSTRIAL PARKS IN SAIGON – DONGNAI RIVER BASIN

L.C. Do Hong¹, K. Becker Van Slooten²

¹*Institute for Environment and Resources (IER),*

National University of Hochiminh (VNU-HCM), Vietnam

(lanchi@hcmier.edu.vn)

²*Ecological Engineering Laboratory (ECOL), ENAC-ISTE,*

Ecole polytechnique fédérale de Lausanne (EPFL), Switzerland

(kristin.becker@epfl.ch)

Abstract

An approach combining a battery of small-scale toxicity tests with physico-chemical analysis was applied to investigate the selected 27 industrial parks along to Saigon-Dongnai river basin. The test battery included an acute toxicity test with the cladoceran *Ceriodaphnia cornuta* developed in previous work as well as two acute toxicity tests with the cladoceran *Daphnia magna* and the bioluminescent bacteria *Vibrio fischeri*. The battery was chosen because it offers attractive features of simplicity, sensitivity and cost-efficiency. Furthermore, *C. cornuta* is an indigenous tropical species which was initially isolated in the Sai Gon River. An important ecotoxicity of different industrial wastewaters was found, especially in the Vinh Loc industrial zone. The results show that Potential Ecotoxic Effects Probe (PEEP) are appropriate tools in combining ecotoxicity tests with physico-chemical analysis for the assessment of water quality as well as for following the effectiveness of industrial wastewater treatment systems. In conclusion, integrating bioassay responses and effluent flow via the PEEP concept is a cost-effective, sensitive, practical and relevant approach to investigate the toxic potential of point source pollution and to prioritize the threat for the receiving water biota.

Keywords: battery of small-scale toxicity test, PEEP, Sai Gon – Dong Nai river basin

1. Introduction

The industrial zones at Sai Gon – Dong Nai river basin has a great social and economic importance but the water body of this city receives many industrial, domestic and agricultural discharges. Direct entrance of pollutants into aquatic ecosystems via complex liquid industrial waste emissions continues to be an important area of concern because of the potentially serious consequences which ecotoxic inputs can have on receiving water biota. Ecotoxicological risk assessment starts being an issue in Viet Nam and it is important to dispose of a test system, which is appropriate for the typical Vietnamese conditions with a species being representative of the invertebrates living in these aquatic ecosystems. In this study, we conduct toxicity test in applying a battery of small-scale toxicity with *D. magna*, *C. cornuta* and *V. fischeri* for assessing ecological risk due to industrial wastewater. To our knowledge, there is very few ecotoxicity data related to this river basin is published.

2. Material and methods

Sampling

Twenty-seven industrial wastewater samples along the Saigon-Dongnai River were taken at discharge of industrial zone or outlet of correspond wastewater treatment plan as illustrated in Figure 1. For each site, four volumes of each 500 ml sample were taken at 15-minute intervals and then made a composite sample. The composite samples were kept in plastic bottle at 4°C for transportation. After arrival at the laboratory, samples were stored at 2-4 °C and were analyzed within maximum 2 weeks.

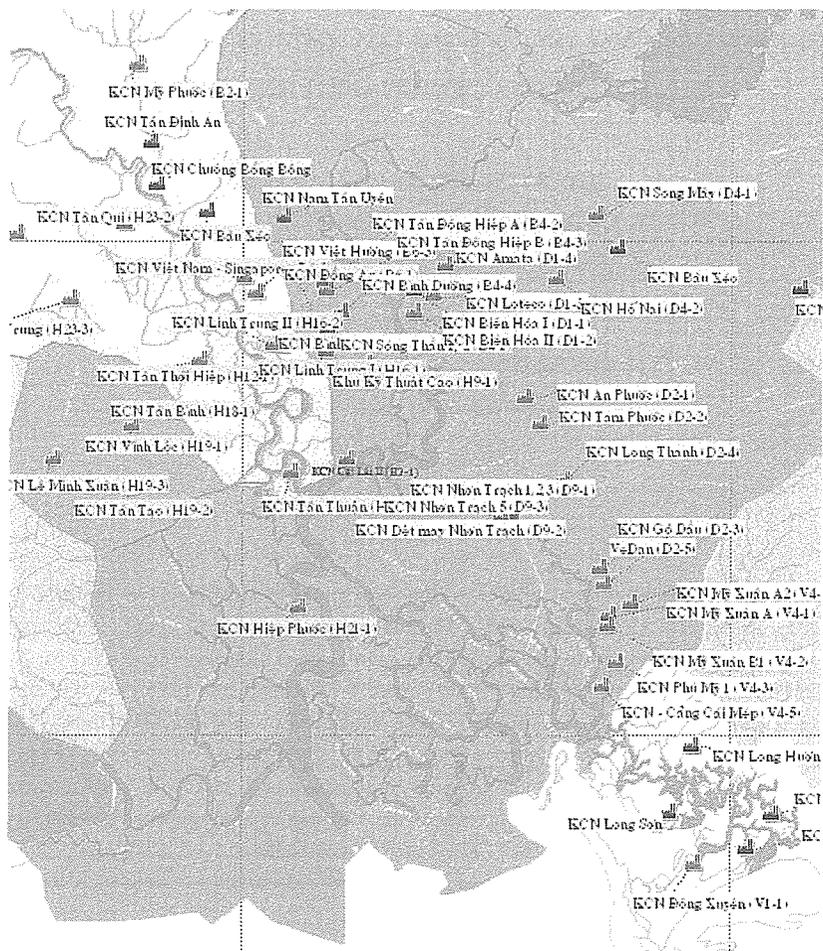


Fig.1 Sampling map

Toxicity test

V. fischeri

The toxicity of the sediment extracts was evaluated with the marine bacteria *V. fischeri* freeze dried bacteria obtained from Azur Environmental, USA using the Microtox analyzer 500 ISO, 1998. The concentration causing 50% inhibition of the light emitted by the bacteria 50% effective concentration EC was determined after 5, 15, and 30 min. The maximum DMSO concentration used for testing was 2%.

D. magna and *C. cornuta*

D. magna and *C. cornuta* or waterflea is a common microcrustacea in fresh water. The culture of *D. magna* Straus clone 1829 was maintained in an M4 medium Elendt, 1990. The test was performed according to the test protocol OECD 202 OECD, 1984, and the immobilization of the *D. magna* was recorded after 24 and 48 h. An International Organization for Standardization ISO medium ISO, 1989 was used during the test for the dilution of the sample and for the control. The maximum DMSO concentration used for testing was 0.1%.

PEEP index

The index of Potential Ecotoxic Effects Probe (PEEP) is to estimate potential ecotoxicity of industrial wastewater. In this study, PEEP index is calculated by following formula.

To get the target of reducing “toxic input”, the PEEP index should be integrated as a executive tool of decision support system for integrated environmental management of the industrial zones along the Saigon – Dongnai river basin.

The authors have proposed to public authorities of provinces located in Saigon – Dongnai river basin the range of PEEP varies from 3 to 3.5 as a standard of effluent which to be less potential risk to the receiving ecology system. The application of this PEEP standard should be divided into two steps. The first step would be the improvement of WWTP to meet PEEP of 3.5 and the second step should be the implementation processes of cleaner production, zero emission, etc. so as to be meet PEEP of 3.

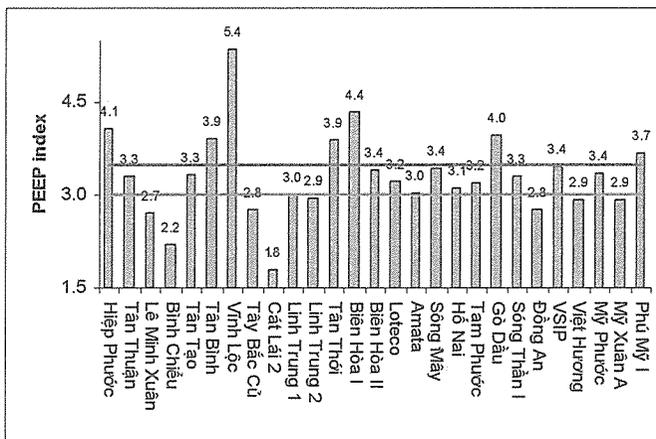


Fig.3 PEEP index of industrial wastewater from selected industrial zones

The study also showed that combination between ecotoxicity tests through bio-responses and analyses of bio-availability of chemical compositions could be a realistic and relevant approach to investigate and to assess the potential risk from a point sources that in this case is industrial wastewater. This approach permits to identify a problematic discharge of receiving water and to predict the ecological potential risk from these point sources.

References

1. Costan, G., N. Bermingham, C. Baise, and J.F. Ferard. 1993. Potential ecotoxic effects probe (PEEP): A novel index to assess and compare the toxic potential of industrial effluents. *Environ. Toxicol. Water Qual.* 8, pp. 115-140.
2. Do Hong L.C., Becker van Slooten K., Tarradellas J., 2001. *Ceriodaphnia cornuta*: a pertinent organism for the ecotoxicological risk assessment of tropical estuarine ecosystems, Proceedings 10th International Symposium on Toxicology Assessment, Québec, Canada, 26-31 August 2001.
3. Do Hong L.C., Becker van Slooten K., Tarradellas J., 2003. Ecotoxicological Risk Assessment for the Saigon-Dongnai River Basin, 2nd Asia Pacific International Conference on Pollutants Analysis and Control, Hochiminh City, Vietnam, December 2003
4. Do Hong L.C., 2005. Toxicity of domestic and industrial wastewater from HCM and proposed bio-monitoring program. Ecotoxicology conference in Melbourne, Australia, September 2005
5. Environmental Canada, 1990. Biological test method: acute lethality test using *Daphnia* spp. Environment Canada, rapport EPS 1/RM/11, Ontario, Canada.
6. ISO, 1989. Qualité de l'eau – Détermination de l'inhibition de la mobilité de *Daphnia magna* Straus (Cladocera, Crustacea). Norme ISO 6341, Organisation Internationale de Normalisation Organisation, Genève, Suisse.
7. OECD, 1983. Ligne Directrice de l'OCDE pour les essais de produits chimiques. *Daphnia* sp., essai d'immobilisation immédiate et essai de reproduction sur 14 jours. N° 202.
8. T. Kusui and C. Blaise. 1999. Ecotoxicological Assessment of Japanese Industrial Effluents Using a Battery of Small-Scale Toxicity Test. In *Impact Assessment of Hazardous Contaminants: Concept and Approaches*. Lewis Publisher. pp 161-181.