



Title	Comprehensive Robot Model Based on Horse Anatomy : Towards Understanding the Passive Dynamics of Limbs
Author(s)	Masuda, Yoichi; Miyashita, Kazuhiro; Kobayashi, Aritsune et al.
Citation	The 11th International Symposium on Adaptive Motion of Animals and Machines (AMAM2023). 2023, p. 61-62
Version Type	VoR
URL	https://doi.org/10.18910/92267
rights	
Note	

The University of Osaka Institutional Knowledge Archive : OUKA

<https://ir.library.osaka-u.ac.jp/>

The University of Osaka

Comprehensive Robot Model Based on Horse Anatomy: Towards Understanding the Passive Dynamics of Limbs

Yoichi Masuda^{1*}, Kazuhiro Miyashita¹, Aritsune Kobayashi¹, Tatsuya Yoshida¹
Megu Gunji², Akira Fukuhara³, Yuji Takahashi⁴, Ohmura Hajime⁴, Kenjiro Tadakuma⁵, Masato Ishikawa¹

¹Department of Mechanical Engineering, Osaka University, Japan

²Department of Life Sciences, Faculty of Life Sciences, Toyo University, Japan

³Research Institute of Electrical Communication, Tohoku University, Japan

⁴Sports Science Division, Equine Research Institute, Japan

⁵Graduate School of Information Sciences Applied Information Sciences, Tohoku University, Japan

**masuda@mech.eng.osaka-u.ac.jp*

Horses, which exhibits high locomotor efficiency among mammals [1], have historically played a vital role in supporting pre-industrial society due to their superior power, speed, and stamina. Understanding the locomotion mechanism of horses will not only contributes to the development of biology but will also to the performance improvement of conventional quadruped robots. In this presentation, we will introduce our group's cross-disciplinary research on a robot model that replicates the tendon configuration and morphology in the limbs at the tissue level based on equine anatomy, investigating the contribution of each tissue to locomotion. Our focus is to reveal the complex mechanisms of tissue interaction within the body during locomotion.

Traditional biology has involved dissecting cadavers and measuring the motion of living organisms to understand the walking mechanisms of animals. However, dissection alone cannot provide observation of the internal structure of a living and moving animal. Furthermore, the sensors for measuring the internal structures of living animals still has technical limitations. Thus, we need new biological tools that can investigate the mechanisms inside the animal body where numerous tissues interact.

Robotics-inspired biology [2], which employs robotic models for biology, is a promising approach of investigating mechanisms within the animal body. Robotic models with real bodies enable a range of experiments that are challenging to perform in vivo or through simulation. The conditions inside a robot body during locomotion are more straightforward to measure than in a living body, and the experiments are more controllable. Invasive experiments that are difficult to perform on animals, such as cutting neural pathways or performing electrical stimulation on a walking robot, can also be performed [3]. The use of computer simulation provides the advantage of increasing the number of trials conducted, however, issues regarding numerical stability and approximation accuracy arise due to factors such as friction, contact, and complex link structures. Moreover, simulating the diverse and ambiguous real-world environments poses a

challenge. In the future, the advancement of robot models as a tool for biology may offer novel advantages that were previously unattainable.

When utilizing robots for the investigation of animal locomotion mechanisms, one of the primary concerns is the validity of the robot as a biological model. Most current robot models possess a simple structure comprising a motor and rigid links to facilitate design and maintenance. While such simple models are useful for investigating the coarse dynamics surrounding animals, such as the impact of shape changes on the animal's body surface and the conduct of its center of gravity, an elaborated model that reproduces the configuration and morphology of the tissues under investigation on a biological basis is necessary to examine the interactions between tissues in an animal and the contribution of each tissue to the motion. A comparable argument is presented in the "Templates and Anchors" paper [4].

Furthermore, we wish to stress the importance of "comprehensive biomimetics" in animal modeling [5]. Despite having finite physical and computational resources, animals exhibit the versatility to survive in a diverse and complex environment, where they encounter an almost infinite number of situations. In other words, animals display situation-dependent multi-functionality, wherein one part of the body can demonstrate various capabilities depending on the circumstances. The author think that the such versatility of the animal body is generated by the embodiment at the tissue level within the animal body and by chance encounters between the tissues and the environment. Conversely, a simple robot model that replicates only certain functions will overlook many potential functions other than the one focused on. To explore the versatility of situation-dependent animal bodies in the future, it is necessary to create a complex model that reproduces the structure of the animal body at the tissue level and has potential multi-functionality.

We have designed an elaborated anchor model of the muscle-tendon network inside a horse limb to understand the locomotion mechanism of the horse at the tissue level. Re-

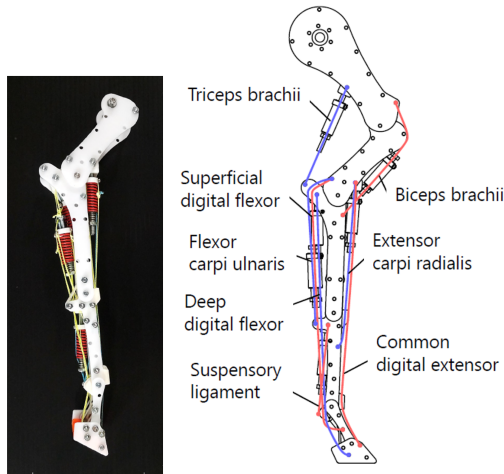


Figure 1: A comprehensive robotic model of a horse forelimb. We reproduced mass of each part, elasticity, and the interlocking mechanisms between the joints.

cently, we have realized the forelimb model shown in Fig. 1 in addition to the conventional hindlimb model [6]. We have approximated the horse skeleton with a linkage structure based on dissection of a horse cadaver and have been conducted walking experiments by reproducing the six major muscle-tendon complexes in the hind and forelimbs.

We ensured the validity of the robot model from two perspectives: the tissue level and the behavioral level. To ensure the validity at the tissue level, the mass of each part of the horse limb and the nonlinear elasticity of the muscle-tendon complex were modeled at a 1/4 size based on the scaling rule [6, 7]. Additionally, to ensure the validity of the behavioral level, the interlocking mechanisms of the horse limb was reproduced. The equine limb is equipped with a network of muscle-tendon networks called the stay apparatus, which passively interlocks multiple joint angles. Thus, we measured the interlocking patterns between joints by dissecting a horse and designed the natural length of tendons in the robot model to match these patterns.

Since this model reproduces the passive dynamic characteristics of the limbs of a deceased horse, each muscle-tendon complex module is not equipped with an actuator and does not move actively. Despite this, the walking robot equipped with this model generated a smooth walking motion like a horse simply by swinging its hip joints. The results suggest that a significant portion of the coordinated patterns of the horse's joint motion is a result of the passive dynamics.

The advantage of utilizing an comprehensive biomimetic robot as a biological tool is that it can emulate the muscle-tendon network of animals, with each element corresponding to a specific muscle-tendon unit. In future, by measuring the elastic energy of each spring module, we aim to elucidate the complex mechanisms involved in the leg motion of the horse at a tissue-level resolution.

As these robot models become more sophisticated as a tool for biology, they may offer various advantages to biology that were not available in the past. Researches have also been conducted in recent years to construct anchor models of animals [6, 8–13], and the research field will become increasingly crucial in the future. The attempt to simultaneously contribute to both biology and robotics by bringing robot models closer to animals has the potential to establish a novel interdisciplinary domain that seamlessly integrates the processes of comprehending biological mechanisms and designing and controlling robots.

Acknowledgements

We are grateful to Dr. S. Kawada (NSMT) for allowing us to dissect the fresh carcasses of reindeer. This research is partially supported by JSPS KAKENHI (Grant-in-Aid for Challenging Exploratory Research) Grant Number 21H01269, 21H01276, Sekisui Integrated Research, and Japan Science and Technology Agency FOREST Program Grant Number JPMJFR202F.

References

- [1] A. A. Biewener and S. N. Patek, "Animal locomotion" Oxford University Press, 2018.
- [2] N. Gravish, and G. V. Lauder, "Robotics-inspired biology" *Journal of Experimental Biology*, 221(7), jeb138438, 2018.
- [3] T. Tanikawa, Y. Masuda, M. Ishikawa, "A reciprocal excitatory reflex between extensors reproduces the prolongation of stance phase in walking cats: Analysis on a robotic platform" *Frontiers in Neurorobotics*, 15, 636864, 2021.
- [4] R. J. Full, , D. E. Koditschek, "Templates and anchors: neuromechanical hypotheses of legged locomotion on land" *Journal of experimental biology*, 202(23), 3325-3332, 1999.
- [5] A. Fukuhara, M. Gunji, and Y. Masuda, "Comparative anatomy of quadruped robots and animals: a review" *Advanced Robotics*, 36(13), 612-630, 2022.
- [6] K. Miyashita, Y. Masuda, M. Gunji, A. Fukuhara, K. Tadakuma, and M. Ishikawa, "Emergence of Swing-to-Stance Transition from Interlocking Mechanism in Horse Hindlimb" *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2020.
- [7] K. Miyashita, Y. Masuda, M. Gunji, A. Fukuhara, K. Tadakuma, and M. Ishikawa, "Development of Series Spring Tendon Module Imitating Tendon Properties of Horses" *The Proceedings of JSME annual Conference on Robotics and Mechatronics (Robomec)*, 2P1-I05, 2021, domestic.
- [8] Rosendo, Andre, et al. "Quadrupedal locomotion based on a muscular activation pattern with stretch-reflex." 2014 IEEE International Conference on Robotics and Biomimetics (ROBIO 2014). IEEE, 2014.
- [9] A. Badri-Spröwitz, A. Aghamaleki Sarvestani, M. Sitti, and M. A. Daley, "BirdBot achieves energy-efficient gait with minimal control using avian-inspired leg clutching" *Science Robotics*, 7(64), eabg4055, 2022.
- [10] A. Fukuhara, M. Gunji, Y. Masuda, K. Tadakuma, and A. Ishiguro, "Flexible shoulder in quadruped animals and robots guiding science of soft robotics" *Journal of Robotics and Mechatronics*, 34(2), 304-309, 2022.
- [11] A. Niikura, H. Nabae, G. Endo, M. Gunji, K. Mori, R. Niiyama, and K. Suzumori, "Giraffe neck robot: First step toward a powerful and flexible robot prototyping based on giraffe anatomy" *IEEE Robotics and Automation Letters*, 7(2), 3539-3546, 2022.
- [12] K. Ito, T. Kinugasa, Y. Okuda, K. Chiba, S. Hida, R. Takasaki, R. Hayashi, K. Yoshida, and K. Osuka, "Stay apparatus in crocodilian hindlimb based on the 'Y' shaped muscular system and robotic implementation" *the 28rd ROBOTICS SYMPOSIA*, 2023, domestic.
- [13] K. Nakano, M. Gunji, M. Ikeda, K. Or, M. Ando, K. Inoue, H. Mochiyama, and Y. Kuniyoshi, " "RobOstrich" Manipulator: A Novel Mechanical Design and Control based on the Anatomy and Behavior of an Ostrich Neck." *IEEE Robotics and Automation Letters*, 2023.