



Title	New Constructions for Nondominated k -Coteries
Author(s)	Choi, Eun Hye; Tsuchiya, Tatsuhiro; Kikuno, Tohru
Citation	IEICE transactions on information and systems. 2000, E83-D(7), p. 1526-1532
Version Type	VoR
URL	https://hdl.handle.net/11094/27249
rights	Copyright © 2000 The Institute of Electronics, Information and Communication Engineers
Note	

The University of Osaka Institutional Knowledge Archive : OUKA

<https://ir.library.osaka-u.ac.jp/>

The University of Osaka

PAPER

New Constructions for Nondominated k -Coterie

Eun Hye CHOI[†], Nonmember, Tatsuhiro TSUCHIYA[†],
and Tohru KIKUNO[†], Regular Members

SUMMARY The k -mutual exclusion problem is the problem of guaranteeing that no more than k computing nodes enter a critical section simultaneously. The use of a k -coterie, which is a special set of node groups, is known as a robust approach to this problem. In general, k -coteries are classified as either dominated or nondominated, and a mutual exclusion mechanism has maximal availability when it employs a nondominated k -coterie. In this paper, we propose two new schemes called VOT and D-VOT for constructing nondominated k -coteries. We conduct a comparative evaluation of the proposed schemes and well-known previous schemes. The results clearly show the superiority of the proposed schemes.

key words: k -mutual exclusion, distributed systems, k -coteries, nondominated coteries, availability

1. Introduction

The distributed mutual exclusion problem is recognized as one of the most fundamental problems in distributed computing. The distributed k -mutual exclusion problem is its generalization and is the problem of guaranteeing that no more than k computing nodes can enter a critical section (CS) simultaneously. The solution to this problem is useful for various applications in a distributed environment. For example, it can be used to restrict the number of broadcasting nodes for congestion control. It can be also useful in the replicated databases that allow bounded ignorance [10]. In such databases, more than one updates are allowed to proceed simultaneously for achieving high concurrency.

Several methods have been proposed for solving the k -mutual exclusion problem. Among them, the use of a k -coterie is known as a reliable approach [1], [3], [4], [7]–[9], [11], [12]. A k -coterie is a special set of subsets of nodes. Each element in a k -coterie is called a *quorum*. For any $k+1$ quorums in a k -coterie, there is always a node that is shared by at least two of the $k+1$ quorums. Each node has to gain permissions from all nodes of a quorum before it is allowed to enter the CS, and thus it is guaranteed that more than k nodes never enter the CS simultaneously.

In the presence of failures, k -coterie-based mutual exclusion mechanisms provide fault-tolerance capabil-

ity: The CS can be still entered if all nodes of a quorum are operational. It is then clear that the availability of a k -coterie-based mechanism depends on the k -coterie adopted by the mechanism.

In general, k -coteries are classified as either *dominated* or *nondominated* [12]. By the definition of domination, k -coteries provide higher availability than the k -coteries that they dominate. Thus nondominated k -coteries can be considered as a class of the most resilient k -coteries to failures.

So far, several constructions for k -coteries have been proposed [1], [3], [4], [7], [8], [11]–[13]. However most of them, including MAJ [4], [8], [13] and DIV [1], [4], can generate nondominated k -coteries only when certain conditions hold.

In this paper, we propose two new schemes, VOT and D-VOT, for constructing k -coteries. VOT is based on voting, and D-VOT is based on a composition of 1-coteries constructed by VOT. First, we show that k -coteries constructed by VOT dominate those by MAJ, and k -coteries constructed by D-VOT dominate those by DIV (unless they are identical). Therefore the new k -coteries constructed by VOT and D-VOT provide higher availability than those by MAJ and DIV, respectively. Furthermore, we show that the k -coteries constructed by both VOT and D-VOT are always nondominated.

The remainder of this paper is organized as follows: In Sect. 2, the formal definition of a k -coterie is given. MAJ and DIV k -coteries are also described in this section. Then, the proposed scheme VOT is explained in Sect. 3. In Sect. 4, the other proposed scheme D-VOT is explained. Comparative evaluation of the new constructions with MAJ and DIV is performed in Sect. 5. Finally, a brief summary is given in Sect. 6.

2. Preliminaries

Let $V = \{v_1, \dots, v_n\}$ denote the set of all nodes in a distributed system where n is the number of nodes. We assume that each node is either operational or nonoperational, and that they are connected via a reliable network. Let p be the reliability of each node (i.e., the probability that a node is operational).

Definition 1 (k -coterie and quorum): A nonempty

Manuscript received November 19, 1999.

Manuscript revised January 31, 2000.

[†]The authors are with the Department of Informatics and Mathematical Science, Graduate School of Engineering Science, Osaka University, Toyonaka-shi, 560-8531 Japan.

set \mathcal{C} of nonempty subsets Q of V is called a k -coterie under V if and only if the following three properties hold:

1. Nonintersection property: For any $h (< k)$ elements $Q_1, Q_2, \dots, Q_h \in \mathcal{C}$ such that $Q_i \cap Q_j = \emptyset (i \neq j, 1 \leq i, j \leq h)$, there exists an element $Q \in \mathcal{C}$ such that $Q \cap Q_i = \emptyset (1 \leq i \leq h)$.
2. Intersection property: For any $k + 1$ elements $Q_1, Q_2, \dots, Q_{k+1} \in \mathcal{C}$, there exists a pair Q_i and Q_j such that $Q_i \cap Q_j \neq \emptyset (1 \leq i, j \leq k + 1)$.
3. Minimality property: For any $Q \in \mathcal{C}$, there is no other element $Q' \in \mathcal{C}$ such that $Q' \subset Q$.

Each element Q of a k -coterie \mathcal{C} is called a *quorum*.

Obviously, if $k > n$, no k -coterie exists. This case is not of interest, so we assume that $k \leq n$ always holds throughout the paper.

To illustrate this concept, let us introduce two well-known constructions for k -coteries, MAJ and DIV.

Definition 2 (MAJ [4], [8], [13]): Suppose $w \leq n/k$ where $w = \lceil (n + 1)/(k + 1) \rceil$. An MAJ k -coterie under V is a set of all subsets of V that have exactly $\lceil (n + 1)/(k + 1) \rceil$ nodes.

Definition 3 (DIV [1], [4]): Suppose that $n \bmod k = 0$, and all nodes of V are partitioned into k subsets of V , V_1, V_2, \dots, V_k , such that $|V_1| = |V_2| = \dots = |V_k| = n/k$. Let \mathcal{C}_i be an MAJ 1-coterie under $V_i (1 \leq i \leq k)$. A DIV k -coterie under V is an union of $\mathcal{C}_i (1 \leq i \leq k)$.

Example 1: Let $V = \{v_1, v_2, v_3, v_4, v_5, v_6\}$. Now consider the following sets of subsets of V , \mathcal{C}_1 , \mathcal{C}_2 , and \mathcal{C}_3 . They are all 2-coteries. Among them, \mathcal{C}_2 is an MAJ 2-coterie. \mathcal{C}_3 is a DIV 2-coterie when the partition of V is $\{\{v_1, v_2, v_3\}, \{v_4, v_5, v_6\}\}$.

$$\begin{aligned} \mathcal{C}_1 &= \{\{v_1, v_2, v_4\}, \{v_3, v_5, v_6\}\}. \\ \mathcal{C}_2 &= \{\{v_1, v_2, v_3\}, \{v_1, v_2, v_4\}, \{v_1, v_2, v_5\}, \{v_1, v_2, v_6\}, \\ &\quad \{v_1, v_3, v_4\}, \{v_1, v_3, v_5\}, \{v_1, v_3, v_6\}, \{v_1, v_4, v_5\}, \\ &\quad \{v_1, v_4, v_6\}, \{v_1, v_5, v_6\}, \{v_2, v_3, v_4\}, \{v_2, v_3, v_5\}, \\ &\quad \{v_2, v_3, v_6\}, \{v_2, v_4, v_5\}, \{v_2, v_4, v_6\}, \{v_2, v_5, v_6\}, \\ &\quad \{v_3, v_4, v_5\}, \{v_3, v_4, v_6\}, \{v_3, v_5, v_6\}, \{v_4, v_5, v_6\}\}. \\ \mathcal{C}_3 &= \{\{v_1, v_2\}, \{v_1, v_3\}, \{v_2, v_3\}, \{v_4, v_5\}, \\ &\quad \{v_4, v_6\}, \{v_5, v_6\}\}. \end{aligned}$$

A k -coterie is used to achieve k -mutual exclusion as follows: Before entering the CS, a node is asked to gain permission from every node in at least one quorum. Each node is allowed to give permission to at most one node. If a node has attained permission, it enters the CS and holds the permission until it leaves the CS. By the nonintersection property, if less than k nodes are in

the CS, a node can enter the CS by selecting an appropriate quorum. Moreover, by the intersection property, more than k nodes cannot enter the CS simultaneously.

In order to evaluate the availability of a k -coterie, a generic measure called (k, r) -availability has been proposed in [8]. This measure is defined as the probability that at least $r (1 \leq r \leq k)$ computing nodes can enter the CS simultaneously in the presence of failures. Since a node can enter the CS if it gets permission from all members of a quorum, the (k, r) -availability of a k -coterie is calculated using the following formula [8]:

$$(k, r)\text{-availability} = \sum_{\forall V' \subseteq V} F_r(V') \times p^{|V'|} \times (1 - p)^{n - |V'|}$$

where $F_r(V') = 1$ iff there exist r mutually disjoint quorums each of which is a subset of V' ; otherwise, $F_r(V') = 0$.

Definition 4 (nondominated coterie): Let \mathcal{C}_i and \mathcal{C}_j be k -coteries ($\mathcal{C}_i \neq \mathcal{C}_j$). We say that \mathcal{C}_i dominates \mathcal{C}_j if, for any $Q \in \mathcal{C}_j$, there exists $Q' \in \mathcal{C}_i$ such that $Q' \subseteq Q$. A k -coterie \mathcal{C} is a nondominated k -coterie if there is no other k -coterie that dominates \mathcal{C} .

Example 2: Consider \mathcal{C}_1 , \mathcal{C}_2 and \mathcal{C}_3 discussed in Example 1. Here \mathcal{C}_2 dominates \mathcal{C}_1 , and \mathcal{C}_3 dominates \mathcal{C}_2 . Furthermore one can prove that \mathcal{C}_3 is a nondominated 2-coterie [12].

By Definition 4, it is easy to see that k -coteries are more resilient to failures than their dominated coteries. Let \mathcal{C}_j be a k -coterie that is dominated by another k -coterie \mathcal{C}_i . Then, for any quorum Q in \mathcal{C}_j , there is a quorum Q' in \mathcal{C}_i such that $Q' \subseteq Q$. Thus, if there exists a quorum in \mathcal{C}_j such that all its nodes are operational, then there also exists such a quorum in \mathcal{C}_i . As mentioned above, the CS can be entered if all nodes of a quorum are operational. Therefore, the availability of a k -coterie is higher than or at least equal to that of any other coteries that the k -coterie dominates.

3. Scheme VOT

In this section, we explain one of the two new constructions and prove that the new k -coteries are always superior to MAJ k -coteries. We call this construction VOT since it uses a technique similar to *weighted voting*[6].

3.1 Construction

First, the values of three integers, a , b , and w , are determined as follows: Let x be an integer such that $(n + 1 + x) \bmod (k + 1) = 0$ and $0 \leq x \leq k$. Let y be

$(n + 1 + x)/(k + 1)$. (1) If y is even or $x < y(y + 1)/2$, then let $a = x, b = 0$ and $w = y = \lceil (n + 1)/(k + 1) \rceil$; (2) Otherwise (that is, y is odd and $x \geq y(y + 1)/2$), let $a = 0, w = \lfloor (n + 1)/(k + 1) \rfloor$ and b be an integer such that $(n + 1 - b) \bmod (k + 1) = 0$ and $0 < b \leq k$.

Next, votes are assigned to nodes in the following way:

- (1) Select any a nodes and assign each of them two votes.
- (2) Select any b nodes and assign each of them zero vote.
- (3) Assign other $n - a - b$ nodes one vote each.

Finally, a k -coterie is formed as follows: Let $W(A)$ denote the number of votes that the nodes in a subset A of V have. Consider a set \mathcal{C}_{vot} of subsets of V such that a subset V' of V is in \mathcal{C}_{vot} iff $W(V') \geq w$ and $W(V'') < w$ for any $V'' \subset V'$. Then, as will be shown later, \mathcal{C}_{vot} is a k -coterie.

Example 3: Let $V = \{v_1, v_2, v_3, v_4, v_5, v_6\}$. Consider the case where $k = 2$ (then $a = 2, b = 0$, and $w = 3$). Assume that two(= a) nodes, v_1 and v_2 , are assigned two votes and the other nodes are assigned one vote. Then, 2-coterie \mathcal{C}_4 shown below is obtained. (Take $Q = \{v_1, v_2\}$ as an example. Then, $W(Q) = 4 (\geq w)$ and there is no $Q' \subset Q$ such that $W(Q') \geq w$. Thus $Q \in \mathcal{C}_4$.) Similarly, 3-coterie \mathcal{C}_5 is formed as shown below.

$$\begin{aligned} \mathcal{C}_4 &= \{\{v_1, v_2\}, \{v_1, v_3\}, \{v_1, v_4\}, \{v_1, v_5\}, \\ &\quad \{v_1, v_6\}, \{v_2, v_3\}, \{v_2, v_4\}, \{v_2, v_5\}, \\ &\quad \{v_2, v_6\}, \{v_3, v_4, v_5\}, \{v_3, v_4, v_6\}, \{v_4, v_5, v_6\}\}. \\ \mathcal{C}_5 &= \{\{v_1\}, \{v_2, v_3\}, \{v_2, v_4\}, \{v_2, v_5\}, \{v_2, v_6\}, \{v_3, v_4\}, \\ &\quad \{v_3, v_5\}, \{v_3, v_6\}, \{v_4, v_5\}, \{v_4, v_6\}, \{v_5, v_6\}\}. \end{aligned}$$

Theorem 1: \mathcal{C}_{vot} is a k -coterie.

Proof: We show that \mathcal{C}_{vot} satisfies the three properties of a k -coterie: the nonintersection property, the intersection property, and the minimality property.

1. Nonintersection property

There are two cases to be considered.

Case 1: There is no node assigned zero vote. (i.e. $b = 0$)

Case 2: There is a node assigned zero vote. (i.e. $b > 0$)

In Case 1, $w = (n + 1 + a)/(k + 1)$, and then $n = kw + (w - a - 1)$. By definition, $W(Q) \geq w$ for all elements Q in \mathcal{C}_{vot} . Now assume $W(Q) \geq (w + 2)$ and let v be any node in Q and $Q' = Q - \{v\}$. Since each node in Q is assigned one or two votes, $Q' \subset Q$ and $W(Q') \geq (w + 2) - 2 = w$. This is a contradiction. Thus $W(Q) = w$ or $(w + 1)$ for all elements Q in \mathcal{C}_{vot} . Furthermore, every node in Q is assigned two votes if $W(Q) = w + 1$. (Assume that there is a node v in Q that is assigned one vote. Then $W(Q - \{v\}) = w$. This is a contradiction.) Thus, if w is even, there is no Q in \mathcal{C}_{vot} such that $W(Q) = w + 1$.

Select $h (< k)$ mutually disjoint elements $Q_1, \dots,$

Q_h in \mathcal{C}_{vot} and let Set denote the union of such h elements. When w is even, each element in Set has w votes. Thus $W(Set) = hw$. Then $W(V - Set) = (kw + w - 1) - hw \geq w + (w - 1) \geq w$, since $W(V) = kw + w - 1$ and $w \geq 1$. When w is odd, each of the h elements has either w or $w + 1$ votes. If it has $w + 1$ votes, all its nodes are assigned two votes, as mentioned above. Since Set contains no more than a nodes assigned two votes, it contains no more than $\lfloor 2a/(w + 1) \rfloor$ elements of \mathcal{C}_{vot} that have $w + 1$ votes. Thus $W(Set) \leq \lfloor 2a/(w + 1) \rfloor (w + 1) + (k - 1 - \lfloor 2a/(w + 1) \rfloor)w = \lfloor 2a/(w + 1) \rfloor (w + 1) + (k - 1)w$. Then $W(V - Set) \geq kw + w - 1 - (\lfloor 2a/(w + 1) \rfloor (w + 1) + (k - 1)w) = w + (w - 1 - \lfloor 2a/(w + 1) \rfloor)$. Since, by definition, $a < w(w + 1)/2$, $W(V - Set) \geq w$. Thus, whether w is even or odd, $W(V - Set) \geq w$. Then there is $Q \subseteq (V - Set)$ such that $W(Q) \geq w$. Clearly, $Q \in \mathcal{C}_{vot}$ and $Q \cap Q_i = \emptyset (1 \leq i \leq h)$.

In Case 2, since $w = (n + 1 - b)/(k + 1)$, $n = kw + (w + b - 1)$. Select $h (< k)$ mutually disjoint elements Q_1, \dots, Q_h in \mathcal{C}_{vot} and let Set denote the union of such h elements. Then $W(Set) = hw$ and $W(V - Set) = kw + (w - 1) - hw \geq w$. Thus there is an element Q in $(V - Set)$ such that $W(Q) \geq w$. Clearly, $Q \in \mathcal{C}_{vot}$ and $Q \cap Q_i = \emptyset (1 \leq i \leq h)$.

In both Case 1 and Case 2, \mathcal{C}_{vot} satisfies the non-intersection property.

2. Intersection property

Assume that there are $k + 1$ mutually disjoint elements in \mathcal{C} . Let Set denote the union of such $k + 1$ elements. In the case where $a > 0$, $W(Set) \geq w(k + 1) = n + a + 1 > n + a$. This is a contradiction. In the case where $a = 0$, $W(Set) = w(k + 1) = n - b + 1 > n - b$. (Recall that there are b nodes that are assigned zero vote.) Since this is also a contradiction, \mathcal{C}_{vot} satisfies the intersection property.

3. Minimality property

Assume that there is a pair of Q and Q' in \mathcal{C}_{vot} such that $Q \subset Q'$. By definition, $W(Q) < w$. This is a contradiction. Thus \mathcal{C}_{vot} satisfies the minimality property. □

3.2 Properties

Here, we prove two properties of new k -coterie \mathcal{C}_{vot} constructed by VOT. One is that \mathcal{C}_{vot} dominates MAJ k -coterie \mathcal{C}_{maj} . The other is that \mathcal{C}_{vot} is nondominated.

Theorem 2: If \mathcal{C}_{maj} exists and $\mathcal{C}_{vot} \neq \mathcal{C}_{maj}$, then \mathcal{C}_{vot} dominates \mathcal{C}_{maj} .

Proof: As mentioned above, \mathcal{C}_{maj} is a set of all y -subsets of V where $y = \lceil (n + 1)/(k + 1) \rceil$. Recall that \mathcal{C}_{maj} exists only when $n \geq yk$. Let x be an integer such that $(n + 1 + x)/(k + 1) = \lceil (n + 1)/(k + 1) \rceil$. Then $n = yk + (y - x - 1)$. Thus $y - x - 1 \geq 0$ iff $n \geq yk$. If $y - x - 1 \geq 0$, then $x < y(y + 1)/2$. Thus, when

\mathcal{C}_{maj} exists, $a \geq 0$, $b = 0$ and $w = \lceil (n + 1)/(k + 1) \rceil$ in VOT, which means that each node is assigned one or two votes in VOT.

Let Q be a quorum in \mathcal{C}_{maj} . First, consider the case where every node in Q is assigned one vote. In this case, Q is also in \mathcal{C}_{vot} since $W(Q) = w$. Next, consider the case where there is at least one node assigned two votes in Q . Since $W(Q) > w$ in this case, Q is also in \mathcal{C}_{vot} if there is no $Q'(\subset Q)$ such that $W(Q') > w$; Otherwise (that is, there is $Q'(\subset Q)$ such that $W(Q') > w$), Q' is in \mathcal{C}_{vot} . Consequently, for all $Q \in \mathcal{C}_{maj}$, there exists $Q' \in \mathcal{C}_{vot}$ such that $Q' \subseteq Q$. Thus \mathcal{C}_{vot} dominates \mathcal{C}_{maj} unless $\mathcal{C}_{vot} = \mathcal{C}_{maj}$. \square

Theorem 2 means that new k -coterie \mathcal{C}_{vot} dominates MAJ k -coterie \mathcal{C}_{maj} if $(n+1) \bmod (k+1) \neq 0$. (Note that \mathcal{C}_{vot} is exactly equal to \mathcal{C}_{maj} if $(n+1) \bmod (k+1)=0$.) As mentioned above, a k -coterie provides higher availability than its dominated coterie. Thus it is guaranteed that the availability of \mathcal{C}_{vot} is always higher than or at least equal to that of \mathcal{C}_{maj} .

Theorem 3: \mathcal{C}_{vot} is a nondominated k -coterie.

Proof: We prove this theorem by contradiction. Assume that \mathcal{C}_{vot} is a dominated k -coterie. Then, because of the theorem of Neilsen and Mizuno [12], there exists a subset H of V that satisfies the following two properties; (P1) for any quorum $Q \in \mathcal{C}_{vot}$, $Q \not\subseteq H$, and (P2) for any k mutually disjoint quorums Q_1, Q_2, \dots, Q_k , there is Q_i ($1 \leq i \leq k$) such that $H \cap Q_i \neq \emptyset$. In the following, we show that $V - H$ contains k mutually disjoint quorums as its subsets, thus contradicting to (P2).

Due to (P1), $W(H) < w$. Since $W(V) = kw + w - 1$, $W(V - H) = W(V) - W(H) \geq kw$. When $a = 0$, that is, each node is assigned one or zero vote, $V - H$ has at least kw nodes that have one vote. Hence it is clear that $V - H$ contains at least k mutually disjoint quorums.

When $a > 0$, every node has one or two votes. In this case, if w is even, then at least k mutually disjoint subsets of $V - H$ exist that have exactly w votes.

Finally, consider the case where $a > 0$ and w is odd. In this case, $w \geq 3$ since we assume $n \geq k$. Let m denote the number of nodes in H that have one vote, and let m' denote the number of nodes in $V - H$ that have one vote. Since $a \leq k$ and $m < w$, $m' = n - a - m = (kw + w - a - 1) - a - m \geq k(w - 2) \geq k$. Hence there is a subset T of $V - H$ that consists of exactly k nodes that have one vote. Let $S = V - (H \cup T)$. Since $W(S) = W(V - H) - W(T) \geq k(w - 1)$ and $w - 1$ is even, there are at least k subsets of S each of which has a total of $w - 1$ votes. By adding each node in T to each of the k subsets, k mutually disjoint quorums can be obtained. Thus the theorem follows. \square

4. Scheme D-VOT (Division Strategy Using VOT)

The other proposed scheme D-VOT is based on VOT and a division strategy used in DIV. As mentioned above, the strategy in DIV partitions all nodes of V into k clusters so as to construct a k -coterie by combining 1-coterie in the clusters. However, since it partitions V equally, its applicability is limited to the cases where $n \bmod k = 0$. In our scheme, D-VOT, the division strategy is extended to an arbitrary number of nodes.

4.1 Construction

Let R be the remainder from integer division of n by k . First, V is partitioned into k clusters (nonempty sets of nodes) V_1, V_2, \dots, V_k with R of clusters containing $\lceil n/k \rceil$ nodes and $k - R$ clusters containing $\lfloor n/k \rfloor$ nodes. Next, let $\mathcal{C}_{dvot} = \mathcal{C}_1 \cup \mathcal{C}_2 \cup \dots \cup \mathcal{C}_k$ where \mathcal{C}_i is the 1-coterie under V_i ($1 \leq i \leq k$) that is constructed by scheme VOT[†]. Then, \mathcal{C}_{dvot} is a k -coterie. (We omit the proof since it is trivial.) Note that VOT does not assign zero vote to any nodes in V if $k = 1^{\dagger\dagger}$, and thus every node is contained in at least one quorum in \mathcal{C}_{vot} .

Example 4: Let $V = \{v_1, v_2, v_3, v_4, v_5, v_6, v_7\}$ and $k = 2$. Then $R = 1$. Suppose that the partition of V is $\{\{v_1, v_2, v_3\}(= V_1), \{v_4, v_5, v_6, v_7\}(= V_2)\}$, and let \mathcal{C}' and \mathcal{C}'' be 1-coterie under V_1 and V_2 constructed by VOT, respectively. Then, 2-coterie \mathcal{C}_6 shown below is obtained.

$$\mathcal{C}_6 = \mathcal{C}' (= \{\{v_1, v_2\}, \{v_1, v_3\}, \{v_2, v_3\}\}) \cup \mathcal{C}'' (= \{\{v_4, v_5\}, \{v_4, v_6\}, \{v_4, v_7\}, \{v_5, v_6, v_7\}\}).$$

4.2 Properties

Let \mathcal{C}_{dvot} be a k -coterie constructed by D-VOT and let \mathcal{C}_{div} be a DIV k -coterie under the same V and partition. Here, we prove two properties of the new k -coterie \mathcal{C}_{dvot} . One is that \mathcal{C}_{dvot} dominates \mathcal{C}_{div} . The other is that \mathcal{C}_{dvot} is nondominated.

Theorem 4: If $\mathcal{C}_{dvot} \neq \mathcal{C}_{div}$, then \mathcal{C}_{dvot} dominates \mathcal{C}_{div} .

Proof: Let $\{V_1, V_2, \dots, V_k\}$ be a partition of V into k clusters. By definition, \mathcal{C}_{div} under V is $\mathcal{D}_1 \cup \mathcal{D}_2 \cup \dots \cup \mathcal{D}_k$ where \mathcal{D}_i is the MAJ 1-coterie under V_i ($1 \leq i \leq k$). \mathcal{C}_{dvot} under V is $\mathcal{C}_1 \cup \mathcal{C}_2 \cup \dots \cup \mathcal{C}_k$ where \mathcal{C}_i is the 1-coterie under V_i ($1 \leq i \leq k$) that is constructed by scheme VOT. By Theorem 2, \mathcal{C}_i dominates \mathcal{D}_i if $\mathcal{C}_i \neq$

[†]When $k = 1$, VOT is equivalent to a 1-coterie construction proposed in [5].

^{††}Note that, in VOT, $a=(0 \text{ or } 1)$, $b = 0$, and $w = \lceil (n + 1)/2 \rceil$ if $k = 1$.

Table 1 The (k, r) -availabilities of VOT, D-VOT, MAJ, and DIV.

			$n=14$	$n=15$	$n=16$	$n=17$
$k=2$	$r=1$	VOT	0.999999932	0.999999915	0.999999981	0.999999996
		MAJ	0.999999932	0.999999813	0.999999973	0.999999996
		D-VOT	0.999992558	0.999992558	0.999992558	0.9999975696
		DIV	0.999992558	-	0.999974756	-
	$r=2$	VOT	0.990769788	0.989319285	0.992419734	0.995332524
		MAJ	0.990769788	0.94444437	0.982996002	0.995332524
		D-VOT	0.994551442	0.994551442	0.994551442	0.9963835104
		DIV	0.994551442	-	0.989976544	-
$k=3$	$r=1$	VOT	0.999999998	1	1	1
		MAJ	0.999999997	1	0.999999999	1
		D-VOT	0.9999979483	0.9999993728	0.9999993728	0.9999993728
		DIV	-	0.9999993728	-	-
	$r=2$	VOT	0.999900715	0.999966375	0.999939017	0.9999713
		MAJ	0.999818639	0.999966375	0.999495466	0.999894354
		D-VOT	0.9994514697	0.9997814336	0.9997814336	0.9997814336
		DIV	-	0.9997814336	-	-
	$r=3$	VOT	0.931389849	0.94444437	0.941620075	0.948624327
		MAJ	0.841640019	0.94444437	0.51472783	0.761797189
		D-VOT	0.9554305819	0.9745391936	0.9745391936	0.9745391936
		DIV	-	0.9745391936	-	-
$k=4$	$r=1$	VOT	1	1	1	1
		MAJ	1	-	1	1
		D-VOT	0.999999385	0.999999385	0.999999385	0.999999812
		DIV	-	-	0.999992518	-
	$r=2$	VOT	0.999998749	0.999997021	0.999998856	0.99999963
		MAJ	0.999998749	-	0.999994076	0.999999
		D-VOT	0.999914036	0.999914036	0.999914036	0.999958479
		DIV	-	-	0.999450223	-
	$r=3$	VOT	0.998525946	0.997822648	0.998469537	0.999012267
		MAJ	0.998525946	-	0.982996002	0.995332524
		D-VOT	0.995469772	0.995469772	0.995469772	0.997012567
		DIV	-	-	0.98471026	-
	$r=4$	VOT	0.841640019	0.847288609	0.855083665	0.863827683
		MAJ	0.841640019	-	0.185302019	0.481785249
		D-VOT	0.892616807	0.892616807	0.892616807	0.910469143
		DIV	-	-	0.806646999	-

D_i ($1 \leq i \leq k$). Then, for any quorum Q in \mathcal{C}_{div} , there exists Q' in \mathcal{C}_{dvot} such that $Q \subseteq Q'$. Thus \mathcal{C}_{dvot} dominates \mathcal{C}_{div} . \square

Theorem 4 means that \mathcal{C}_{dvot} dominates \mathcal{C}_{div} if $(n/k + 1) \bmod 2 \neq 0$. (Note that \mathcal{C}_{div} exists only when $n \bmod k = 0$, and \mathcal{C}_{dvot} is equal to \mathcal{C}_{div} if $(n/k + 1) \bmod 2 = 0$.) Thus it is guaranteed that the availability of \mathcal{C}_{dvot} is always higher than or at least equal to that of \mathcal{C}_{div} .

To prove \mathcal{C}_{dvot} is a nondominated k -coterie, we first introduce a theorem given in [12].

Theorem 5: Let $\{V_1, V_2, \dots, V_k\}$ be a partition of V into k nonempty sets. Let $\mathcal{C} = \mathcal{C}_1 \cup \mathcal{C}_2 \cup \dots \cup \mathcal{C}_k$, and \mathcal{C}_i be a nondominated coterie under V_i ($1 \leq i \leq k$). Then \mathcal{C} is a nondominated k -coterie under V . \square

Theorem 6: \mathcal{C}_{dvot} is nondominated.

Proof: By definition, $\mathcal{C}_{dvot} = \mathcal{C}_1 \cup \mathcal{C}_2 \cup \dots \cup \mathcal{C}_k$ where \mathcal{C}_i


is the 1-coterie under V_i ($1 \leq i \leq k$) that is constructed by scheme VOT. By Theorem 3, \mathcal{C}_i ($1 \leq i \leq k$) is a nondominated coterie. Thus, by Theorem 5, \mathcal{C}_{dvot} is nondominated. \square

5. Experimental Evaluation


In Sects. 3 and 4, we proved that the new constructions VOT and D-VOT provide higher level of availability than MAJ and DIV, respectively. Here, for the purpose of quantitative analysis, we perform experimental evaluation of the four constructions, VOT, D-VOT, MAJ and DIV.

As a measure for evaluation, we consider (k, r) -availability. As mentioned above, (k, r) -availability is a generic measure to evaluate the availability of a k -coterie, and it is defined as the probability that at least r ($1 \leq r \leq k$) nodes can enter the CS simultaneously.


Table 1 shows the (k, r) -availabilities of k -coteries constructed by VOT, D-VOT, MAJ, and DIV when $14 \leq n \leq 17$, $2 \leq k \leq 4$, and $p = 0.9$. First, consider VOT and MAJ. When $(n, k) = (15, 4)$, no MAJ

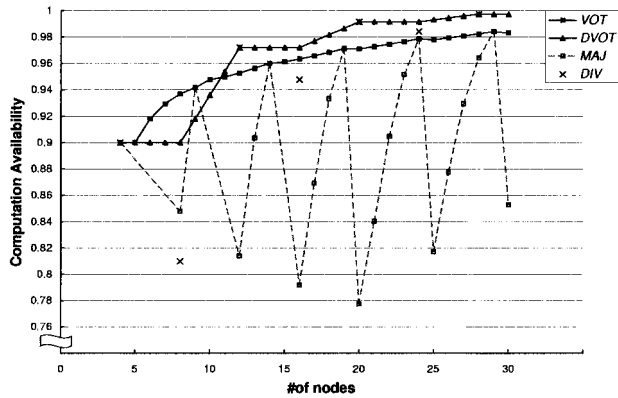


(a1) $4 \leq n \leq 30$ and $p = 0.9$.

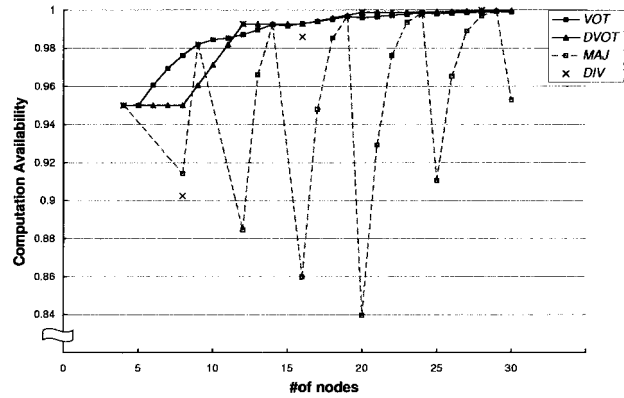

(a2) $4 \leq n \leq 30$ and $p = 0.95$.

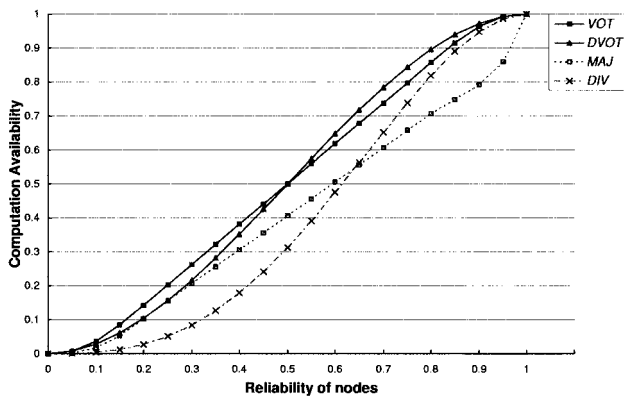

(b1) $n = 16$ and $0 \leq p \leq 1$.

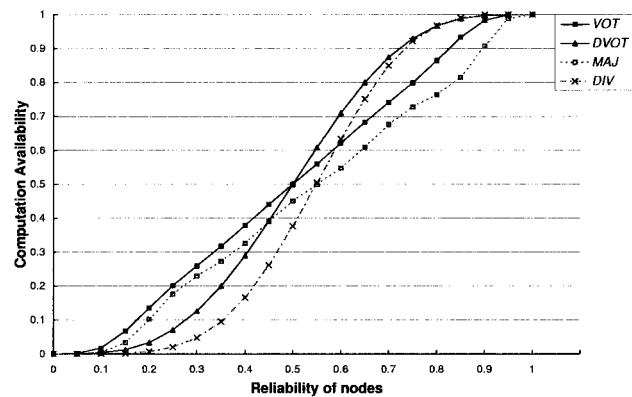

(b2) $n = 40$ and $0 \leq p \leq 1$.

Fig. 1 Computation availabilities of VOT, D-VOT, MAJ, and DIV when $k=4$.

k -coterie exists. When $(n, k) = (14, 2), (14, 4), (15, 3)$, and $(17, 2)$, VOT is equivalent to MAJ since $(n + 1) \bmod (k + 1) = 0$. If $(n + 1) \bmod (k + 1) \neq 0$, the (k, r) -availability of a VOT k -coterie is higher than that of an MAJ k -coterie. Especially, as the value of r increases, the difference of the availabilities between VOT and MAJ becomes larger. For example, when $(n, k, r) = (16, 4, 4)$, the difference of (k, r) -availabilities is larger than 0.6. Next, consider D-VOT and DIV. DIV k -coteries exist only when $(n, k) = (14, 2), (16, 2), (15, 3)$ and $(16, 4)$. When $(n, k) = (14, 2)$ and $(15, 3)$, D-VOT is equivalent to DIV since $(n + 1) \bmod 2 = 0$. In other cases, D-VOT outperforms DIV in (k, r) -availability. Like the relations between VOT and MAJ, as the value of r increases, the difference of the availabilities between D-VOT and DIV becomes larger. As a result, when r is small, VOT provides the highest (k, r) -availability among the four constructions, whereas VOT achieves the highest (k, r) -availability when r is large.

Although (k, r) -availability is a useful and well accepted measure, it may be difficult to compare k -coteries based on this measure only, since r can take any value up to k . For that reason, we introduce *computation availability*[2] as a unified measure for evalua-

tion. Computation availability has been used for evaluating gracefully degradable systems in terms of both availability and performance. Here we define the computation availability of a k -coterie as follows:

$$\text{Computation availability} = \sum_{r=1}^k \alpha_r \times r\text{-availability}$$

where α_r denotes the computation capability when r nodes can enter the CS simultaneously, and r -availability[†] denotes the probability that the maximum number of nodes that can enter the CS simultaneously is exactly r [8]. Assuming that α_r is proportional to r , we set α_r to r/k in the evaluation.

Figure 1 shows the computation availabilities of 4-coteries constructed by VOT, D-VOT, MAJ, and DIV. Figures 1 (a1) and (a2) show the results when $4 \leq n \leq 30$, and $p = 0.9$ and 0.95 , respectively. As the number of nodes increases, the (k, r) -availabilities of VOT and D-VOT become steadily larger. The results thus show the scalability that the proposed schemes exhibit. In the

[†] r -Availability is easily obtained from the (k, r) -availabilities. If $r=k$, then r -availability = (k, r) -availability; otherwise, r -availability = (k, r) -availability - $(k, r+1)$ -availability.

case where $p = 0.9$, VOT provides the highest computation availability when $4 \leq n \leq 10$, and D-VOT provides the highest computation availability when $11 \leq n \leq 30$. In the case where $p = 0.95$, VOT provides the highest computation availability when $4 \leq n \leq 11$, while D-VOT has the highest computation availability when $12 \leq n \leq 30$. Figures 1(b1) and (b2) show the results when $0 \leq p \leq 1$, and $n = 16$ and 40 , respectively. We selected the two values of n because the four schemes construct different k -coterie when n has these values[†]. In both cases, when $0 < p < 0.5$, VOT provides the highest computation availability, while when $0.5 < p < 1$, D-VOT provides the highest computation availability. Interestingly, the computation availability of VOT and D-VOT is exactly equal to 0.5 when $p = 0.5$.

6. Conclusion

In this paper, we have proposed two new schemes VOT and D-VOT of constructing k -coterie. In scheme VOT, k -coterie are constructed by using weighted voting. In scheme D-VOT, k -coterie are constructed by using the partition of nodes and scheme VOT. We have shown that the k -coterie constructed by VOT and D-VOT dominate those by MAJ and DIV, respectively. We have also shown that the k -coterie constructed by both VOT and D-VOT are nondominated, which means that the new k -coterie provide higher availability than any of their dominated coterie. Furthermore, we have evaluated the four schemes in terms of (k, r) -availabilities and the computation availabilities. The superiority of the new k -coterie has been also shown by the results.


Acknowledgements

The authors would like to thank anonymous referees for their helpful suggestions.


References

- [1] D. Agrawal, Ö. Eğecioğlu, and A.E. Abbadi, "Analysis of quorum-based protocols for distributed $(k+1)$ -exclusion," *IEEE Trans. Parallel & Distributed Systems*, vol.8, no.5, pp.533–537, 1997.
- [2] M.D. Beaudry, "Performance-related reliability measures for computing systems," *IEEE Trans. Comput.*, vol.27, no.6, pp.540–547, 1978.
- [3] Y.I. Chang and B.H. Chen, "An extended binary tree quorum strategy for k -mutual exclusion in distributed systems," *Proc. Pacific Rim International Symposium on Fault Tolerant Systems*, pp.110–115, 1997.
- [4] S. Fujita, M. Yamasita, and T. Ae, "Distributed k -mutual exclusion problem and k -coterie," *Proc. International Symposium on Algorithms, Lecture Notes in Computer Science*, vol.557, pp.22–31, 1991.

- [5] H. Garcia-Molina and D. Barbara, "How to assign votes in a distributed system," *J.ACM*, vol.32, no.4, pp.841–860, 1985.
- [6] D. Gifford, "Weighted voting for replicated data," *Proc. 7th ACM Symp. Oper. Syst. Principles*, pp.150–162, 1979.
- [7] J.R. Jiang, S.T. Huang, and Y.C. Kuo, "Cohorts structures for fault-tolerant k entries to a critical section," *IEEE Trans. Comput.*, vol.46, no.2, pp.222–228, 1997.
- [8] H. Kakugawa, S. Fujita, M. Yamasita, and T. Ae, "Availability of k -coterie," *IEEE Trans. Comput.*, vol.42, no.5, pp.553–558, 1993.
- [9] H. Kakugawa, S. Fujita, M. Yamasita, and T. Ae, "A distributed k -mutual exclusion algorithm using k -coterie," *Inform. Process. Lett.*, vol.49, pp.213–218, 1994.
- [10] N. Krishnakumar and A.J. Bernstein, "Bounded ignorance: A technique for increasing concurrency in a replicated system," *ACM Trans. Database Syst.*, vol.19, no.4, pp.586–625, 1994.
- [11] Y.C. Kuo and S.T. Huang, "A simple scheme to construct k -coterie with $O(\sqrt{N})$ uniform quorum sizes," *Inform. Process. Lett.*, vol.59, pp.31–36, 1996.
- [12] M.L. Neilsen and M. Mizuno, "Nondominated k -coterie for multiple mutual exclusion," *Inform. Process. Lett.*, vol.50, pp.247–252, 1994.
- [13] S.M. Yuan and H.K. Chang, "Comments on availability of k -coterie," *IEEE Trans. Comput.*, vol.43, no.12, p.1457, 1994.

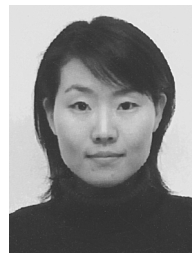

Eun Hye Choi received ME degree in computer engineering from Osaka University in 1999. She is currently a student of doctoral course in the Department of Informatics and Mathematical Science at Osaka University. Her research interests include distributed and fault-tolerant computing systems.

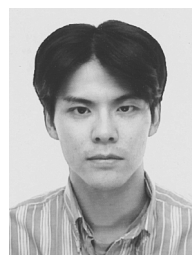

Tatsuhiro Tsuchiya received ME and PhD degrees in computer engineering from Osaka University in 1995 and in 1998, respectively. He is currently a research associate in the Department of Informatics and Mathematical Science at Osaka University. His current research interests are in the areas of distributed computing and fault-tolerant computing.



Tohru Kikuno received MS and PhD degrees from Osaka University in 1972 and 1975, respectively. He was with Hiroshima University from 1975 to 1987. Since 1990, he has been a professor in the Department of Informatics and Mathematical Science at Osaka University. His research interests include the quantitative evaluation of software development processes, the analysis and design of fault-tolerant systems, and the design of procedures for testing communication protocols.

He served as a program co-chair of the First International Symposium on Object-Oriented Real-Time Distributed Computing (ISORC'98) and the Fifth International Conference on Real-Time Computing Systems and Applications (RTCSA'98).

[†]Consider other values of n . For example, when $n = 20$, D-VOT is equivalent to DIV, and when $n = 24$, VOT is equivalent to MAJ.